




材質	表面処理
Aluminium alloy (5% magnesium) to BS 1473 5056A DIN 1725 Al Mg5 Werkstoff 3.3555	生地

A = Head Diameter
B = Head Thickness
C = Length
D = Shank Diameter

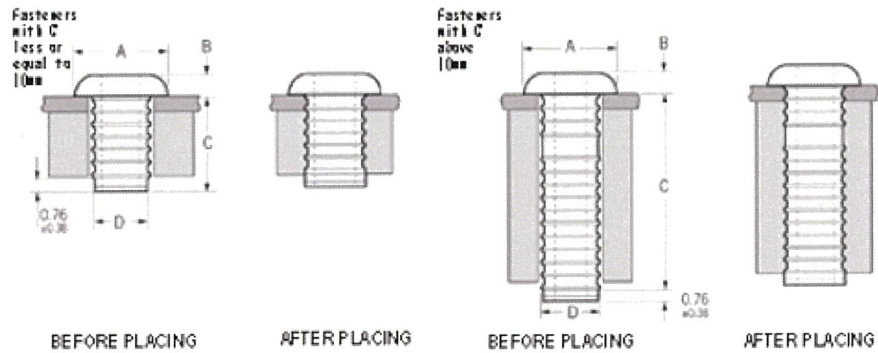

標準リベットサイズ

(単位:mm)

呼び径	標準下穴		A		B	C	D		製品番号	Fastners per pod*
	min.	max.	min.	max.	max.		min.	max.		
2.5	2.50	2.60	3.8	4.2	1.0	5.2	2.31	2.47	01189-02506	51
						6.8			01189-02508	41
						8.4			01189-02510	33
						10.0			01189-02512	28
						11.5			01189-02514	24
						13.1			01189-02516	21
						14.7			01189-02518	19
						16.3			01189-02520	17
						17.9			01189-02522	16
						2.8			2.80	2.90
6.8	01189-02808	41								
8.4	01189-02810	33								
10.0	01189-02812	28								
11.5	01189-02814	24								
13.1	01189-02816	21								
14.7	01189-02818	19								
16.3	01189-02820	17								
17.9	01189-02822	16								

*Nominal value only. Tolerance ±1 fastener per pod.

標準強度

Shear These figures represent the maximum recommended force to be applied to the fastener, which will not cause it to fracture.

呼び径	押抜
	KN
2.5	0.030
2.8	0.045