

Avtronic® 1189 Series

Speed Fastener



材質・表面処理・形状


丸頭

アルミ (注1)

生地

注1 : BS 1473 5056A DIN 1725

AlMg5 Werkstoff 3.3555

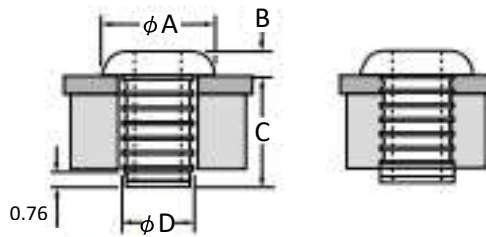

リベット 呼径	推奨 締結板厚		加工物 推奨下穴径		φA	B	C	φD	参考強度 押抜 (kN)	リベット数/ カートリッジ	品番						
	最小 (mm)	最大 (mm)	最小 (mm)	最大 (mm)								最大 (mm)	最大 (mm)	最大 (mm)	±1		
2.5	1.6	4.6	2.5	2.6	4.2	1.0	5.2	2.48	0.03	51	1189-2506						
	4.6	6.1					6.8					41	1189-2508				
	6.1	7.5					8.4										
	7.5	9.0					10.0							28	1189-2512		
	9.0	10.4					11.5										
	10.4	11.8					13.1									24	1189-2514
	13.3	14.7					16.3										
2.8	1.6	4.6	2.8	2.9	4.2	1.0	5.2	2.75	0.04	52	1189-2806						
	4.6	6.1					6.8					41	1189-2808				
	6.1	7.5					8.4										
	7.5	9.0					10.0							33	1189-2810		
	14.7	16.1					17.9									28	1189-2812
16	1189-2822																

※下記品番は生産中止により廃番となっています。

1189-2518、1189-2522、1189-2814、1189-2816、1189-2818、1189-2820

